



# INSTALLATION

## STILETTO AXLE CAPS

## 1205

**FITS: '87 FXLR/FXRS-SP/FXRT, ALL '88-'00 FXR, ALL 88-UP XL, ALL '91-'UP DYNA (EX. '04-UP FXD/FXD/FXDL), ALL '85-UP SOFTAIL (EX. SPRINGER/DEUCE), ALL '84-'99 DRESSERS AND ROAD KINGS, AND '80-'86 FXWG.**

PART#	INCLUDED
201280	1 1/2"-20 Hex Nut — Zinc
601205	2 Stiletto Axle Cap
200193	2 10-32 x 1/4" Set Screw — Stainless
301205	1 Instruction

### TOOLS SUGGESTED

3/32" Hex Key, 3/4" Wrench, 7/8" Socket with Torque Wrench (ft/lb)

### PROCEDURE AVERAGE TIME 5 MINUTES

**STEP 1** Remove stock axle nut and replace with nut provided. Torque to 50-55 ft/lbs.

**STEP 2** Start a 10-32 x 1/4" set screw in each of the Stiletto Axle Caps and run them in until their tips are flush with the inside surfaces of the caps.

**STEP 3** Slide the cap in place and tighten the set screw.

- On the left side, rotate the cap back and forth slightly to ensure the set screw seats firmly against one of the nut's "flats".
- On the right side of the bike, make sure the set screw is completely clear of the hole in the axle.

*Ride On!*

### E-MAIL

techsupport@kuryakyn.com  
or call 715.247.2983

### WARRANTY

Kuryakyn™ warrants that any Kuryakyn product sold hereunder, if properly installed, maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of one (1) year from the date the Kuryakyn products are sold to the customer.


**CONSEQUENTIAL DAMAGES:**  
Kuryakyn shall not be liable for any consequential or incidental damages.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2003 Kuryakyn USA™ All Rights reserved.

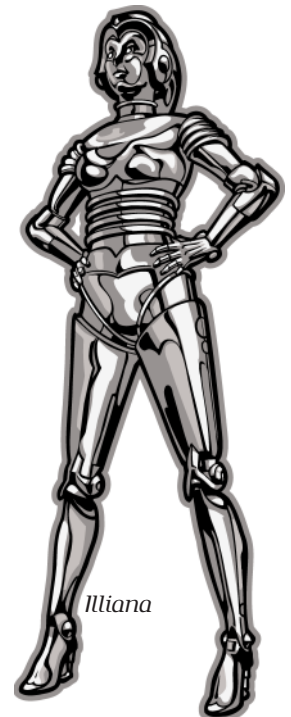

*Illiana*