



## PREMIUM WIDOW™ GRIPS

## 6275

**FITS: '08-UP DRESSERS, ROAD KINGS, ROAD GLIDES, STREET GLIDES**

### PARTS INCLUDED

- 1 Clutch Side Widow Grip
- 1 Throttle Side Widow Grip
- 1 Glue Bottle
- 1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Set of hex wrenches, Torx drivers, combination wrenches, Utility knife, 80-100 grit sandpaper/emery cloth, adhesive solvent

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### THROTTLE SIDE PROCEDURE


**ATTENTION!** A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all of the steps in the procedure; consult a trained technician.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle.

**CAUTION!** Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

**STEP 1** Park the motorcycle on a hard, level surface and turn off the ignition.

**STEP 2** Separate the switch housings by removing the two Torx screws (shown in PIC.1); set the screws aside, they will be re-used.

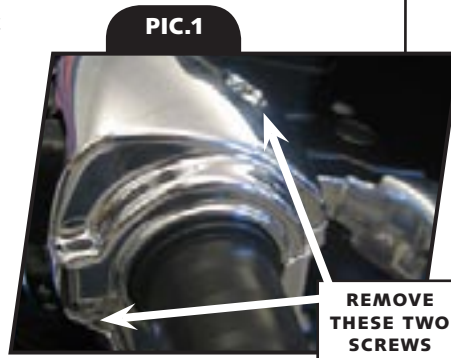

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Küryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA All Rights reserved.



**STEP 3** With the switch housings separated, slide the stock handgrip assembly off the handlebars. This will not be re-used.

**STEP 4** Slide on the new grip assembly in the desired orientation (with the widow's head in the up position) making sure the teeth on the inside of the grip assembly are positively engaged in the teeth of the sensor, and the flange is seated inside the switch housing (see [PIC.2](#)).

**STEP 5** Reassemble the switch housings using the two Torx screws that were removed in STEP 2.

## THROTTLE BOSS ADJUSTMENT PROCEDURE

**STEP 6** Loosen the socket head cap screws in the end of the grip. See [PIC.3](#).

**STEP 7** Adjust the position of the throttle boss as desired (See [PIC.3](#)) and retighten the screws; do not over tighten the screws.

## CLUTCH SIDE PROCEDURE

**STEP 1** Remove the two Torx head screw securing the switch housing halves together (shown in [PIC.4](#)) set them aside for now, they will be re-used. It may be necessary to loosen the clutch control clamp to separate the housing halves.

**STEP 2** Remove the clutch side grip. A sharp utility knife may be used to cut the grip lengthwise allowing you to "peel" the existing grip from the handlebar.

**STEP 3** Sand the clutch side handlebar surface with 80-100 grit sandpaper or emery cloth to remove any previous glue or rubber residue. This provides a pristine metal surface for the new adhesive and the roughness provides the adhesive a better surface to adhere to.

**STEP 4** Clean the exposed handlebar with solvent and allow the area to dry completely.

**STEP 5** Clean inside the grip with a mild solvent, such as window cleaner, to remove any grime or residue. Allow to dry completely.

**ATTENTION!** Note the orientation of the "Widow's Head" when sliding the grip on, and slide it onto the handlebar far enough so that the rubber flange will locate inside the channel in the switch housing. See [PIC.5](#) and [FIG.1](#).

**STEP 6** Apply glue to the inside of the clutch side grip. Distribute the glue evenly inside the grip for the best adhesion. (Do not touch glue with fingers – Harmful to paint & skin.) Additional warnings and safety information are on the adhesive label.

**STEP 7** In one smooth motion, slide the grip onto the handlebar and into position. Rotate it back and forth slightly as you slide it on to help distribute the glue evenly and keep the grip from "plowing" the glue up against the switch housing. You must work quickly to get the desired position before the glue sets up. (Approximately six (6) seconds).


**STEP 8** Once in place, squeeze the grip firmly to press the rubber against the bar and hold for 15 seconds. Allow a minimum of ten minutes to cure before operating the motorcycle.

-cont.-

**PIC.2**



**PIC.3**

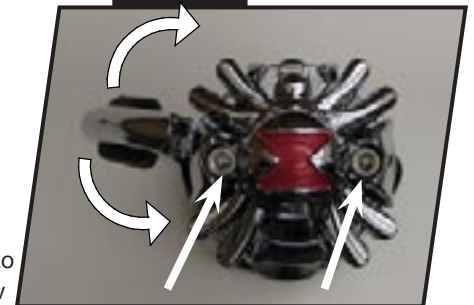


**PIC.4**



**PIC.5**



**FIG.1**

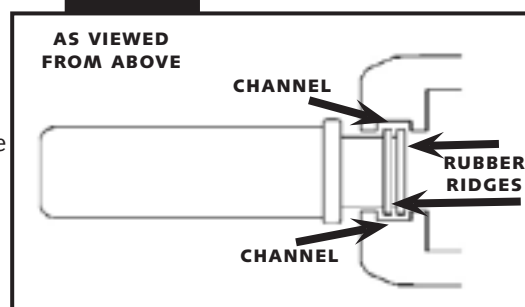

**STEP 9** Reassemble the switch housings using the two Torx screws that were removed in STEP 1.

**STEP 10** Ensure proper operation and clearance before operating the motorcycle.

**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

**Kuryakyn**

*Ride On!*

**PAGE**

**2**

**PREMIUM WIDOW GRIPS**

**INSTALLATION**